

TG TUBOFLEX 150

TECNODESGAST

Tecnología del desgaste

www.tecnodesgast.com




FLEXIBLE PIPE

APLICACIONES

Flexible hoses lined with Sintered Alumina -ALÚMINA 150-, are ideal for use in highly aggressive services where conventional rubber hose connections, expansion joints or bellows require frequent replacement. Ceramic lined hoses can also be used to isolate mechanical vibrations or to connect non-stationary equipment. It is widely used in cement plants, smelters, corrosion resistance, coal dust and slurry supply system and is also used for port and river dredging suction sand, concrete pump vehicles, etc.

FEATURES

1. Impact resistant: Virtually impossible to destroy ceramic segments.
2. Flexible: the minimum bending radius is approximately 10/12 times the inner diameter of the hose.
3. Corrosion resistant.
4. Wide variety of end connections.
5. Buy any continuous length up to 10/20m.

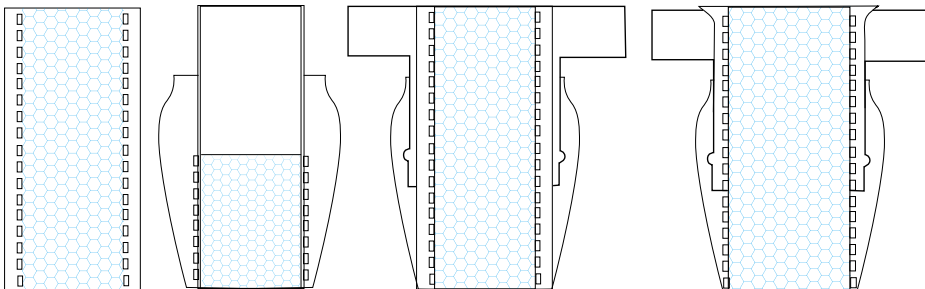

TECHNICAL DATA

1. Size range from DN25 to DN600 in length 10/20 meters
2. Maximum operating pressure 10 bar
3. Maximum operating temperature 120°C

